





# TYPE 915 EIP IWRC: NINE-PART BRAIDED SLING

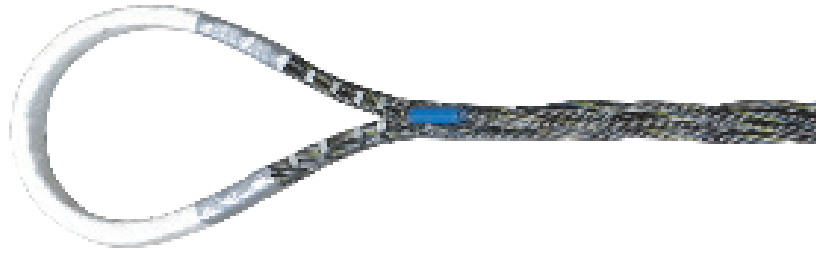

	Rope Dia. (")	Sling Dia. (")	Rated Capacity (Tons)			Eye Dimensions (")	
			Vertical	Choker Hitch	Basket Hitch	Eye Width	Eye Length
							
<b>6x19 or 6x36 EIP</b>	1/4	1	4.3	3.2	8.6	6	12
	5/16	1-1/4	6.6	5	13	6	12
	3/8	1-1/2	9.5	7.1	19	7-1/2	13
	7/16	1-3/4	14	11	29	9	18
	1/2	2	19	14	38	10	20
	9/16	2-3/16	24	18	48	12	24
	5/8	2-1/2	29	22	59	12	24
	3/4	3	42	32	84	15	30
	7/8	3-1/2	57	43	114	17	34
	1	4	74	56	148	20	40
<b>6x36 EIP</b>	1-1/8	4-1/2	93	60	187	22	44
	1-1/4	5	115	86	230	25	50
	1-3/8	5-1/2	138	104	276	27	54
	1-1/2	6	164	123	328	30	60
	1-3/4	7	220	165	440	35	70
	2	8	285	214	570	40	80
	2-1/4	9	355	267	711	45	90
	2-1/2	10	434	326	869	50	100
	2-3/4	11	485	358	970	55	110
	3	12	574	424	1148	60	120
3-1/2	14	761	563	1421	70	140	
4	16	972	719	1544	80	160	
4-1/2	18	1200	888	2400	90	180	

Rated Capacities based on pin diameter no larger than natural width or less than the nominal diameter

Rated Capacities in basket hitch based on D/d ratio of 5 times the sling body diameter

Rated Capacities based on design factor of 5.

Horizontal sling angles of less than 30° shall not be used.