




S-3319



- Designed for utility applications using synthetic rope.
- Suitable for positioning before lifting.
- Hook is forged alloy steel, Quenched & Tempered.
- Design of hook provides needed overhaul weight.
- Utilizes spool & shield designed to protect rope and keep rope positioned correctly on spool.
- Spool provides wider rope bearing surface resulting in an increased area for load distribution and reduces rope abrasion.

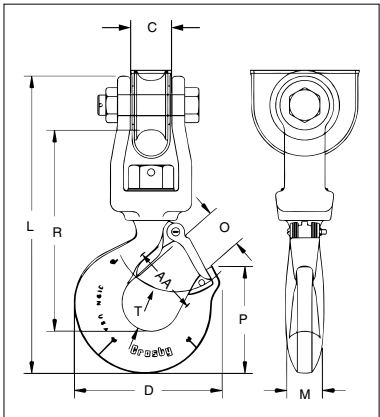

APPLICATION AND WARNING INFORMATION  
SECTION 17

S-3319 Utility Swivel Hook

| Working Load Limit (t) | Stock No. | Weight Each (lb) | Hook ID Code | Synthetic Rope Size (in) | Dimensions (in) |      |       |      |      |      |      |      |      | Replacement Latch Kit Stock No. |
|------------------------|-----------|------------------|--------------|--------------------------|-----------------|------|-------|------|------|------|------|------|------|---------------------------------|
|                        |           |                  |              |                          | C               | D    | L     | M    | O    | P    | R    | T    | AA*  |                                 |
| 1.63                   | 1002054   | 4.2              | HA           | 9/16 - 5/8               | 1.09            | 3.99 | 8.75  | .94  | 1.16 | 2.78 | 5.94 | 1.16 | 2.00 | 1096468                         |
| 2.50                   | 1002063   | 8.0              | IA           | 3/4 - 13/16              | 1.31            | 4.84 | 10.56 | 1.13 | 1.41 | 3.47 | 7.06 | 1.53 | 2.50 | 1096515                         |
| 4.50                   | 1002072   | 15.0             | JA           | 7/8 - 1-1/16             | 1.78            | 6.29 | 12.75 | 1.44 | 1.78 | 4.59 | 8.69 | 1.94 | 3.00 | 1096562                         |

5:1 Design Factor. Maximum allowable proof load is 2 times the Working Load Limit. \*Deformation indicators.