

**Kennedy**  
Wire Rope & Sling Company

**CHAIN SLING**  
C A T A L O G



**45+**  
YEARS OF EXCELLENCE

For more information, visit us at [kwrs.com](http://kwrs.com) 



## KENNEDY WIRE ROPE & SLING COMPANY

For over 45 years, Kennedy Wire Rope & Sling Company has been dedicated to providing the highest quality lifting and rigging equipment to the many industries we serve. We strive to be an industry leader and remain dedicated to providing our valued customers with the very best the industry has to offer. All of our slings are fabricated in ISO 9001:2015 certified facilities, and all hardware we supply is manufactured to industry standards and meets all safety requirements. When you partner with us, you can rest assured that our knowledgeable staff and superior products will help you get the job done safely. Contact us today!



### Corpus Christi

302 Flato Rd.  
Corpus Christi, TX 78405  
(800) 289-1445 • (361) 289-1444



### San Antonio

4202 Dividend Dr.  
San Antonio, TX 78219  
(833) 460-3095 • (210) 527-0555



### Houston

5600 Surrey Square St.  
Houston, TX 77017  
(800) 392-5510 • (713) 673-7881

*Texas-based and globally ready.*

*Backed by a team that covers all of Texas and beyond.*

# TABLE OF CONTENTS



Single leg with Master Links	<b>4</b>
Single Leg with Master Link and Sling Hook	<b>5</b>
Single Leg with Master Link and Grab Hook	<b>6</b>
Single Leg with Master Link and Foundry Hook	<b>7</b>
Adjustable Single	<b>8</b>
Single Endless Basket	<b>9</b>
Double leg with Master Link and Grab Hook	<b>10</b>
Double leg with Master Link and Sling Hook	<b>11</b>
Double leg with Master Link and foundry Hook	<b>12</b>
Adjustable Double	<b>13</b>
Double Endless Basket	<b>14</b>
Triple leg with Master Link and Sling Hook	<b>15</b>
Quadruple Leg with Master Link and Sling Hook	<b>16</b>



# CHAIN SLINGS

When the lift demands absolute strength, chain slings deliver. Built from high-grade alloy steel, chain slings are designed for the toughest environments, handling heavy loads, sharp edges, and extreme conditions with unwavering reliability.

Choose Kennedy Chain Slings for:

**Unmatched Durability:** Engineered to withstand abrasion, impact, and high heat, chain slings thrive where other lifting options fall short.

**Power You Can Trust:** High load ratings and rugged construction provide confidence on every lift, even in the most demanding applications.


**Jobsite Versatility:** Adjustable and adaptable, chain slings are ideal for handling uneven, bulky, or hard-to-rig loads with precision.

From steel mills and fabrication shops to construction sites and industrial facilities, chain slings are the go-to choice when performance matters most. Tough, dependable, and built to last — chain slings keep heavy work moving safely and efficiently.

**Don't see what you need? Our team specializes in bringing your project requirements to life. Give our sales team a call to discuss the possibilities!**




## SINGLE LEG WITH MASTER LINKS

Chain Size		Single Sling
MM	IN	 90°
7	9/32	4,300
8	5/16	5,700
10	3/8	8,800
13	1/2	15,000
16	5/8	22,600
20	3/4	35,300
22	7/8	42,700

Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.



**SINGLE LEG WITH MASTER LINK AND SLING HOOK**

Chain Size		Single Sling
MM	IN	
		 90°
7	9/32	4,300
8	5/16	5,700
10	3/8	8,800
13	1/2	15,000
16	5/8	22,600
20	3/4	35,300
22	7/8	42,700

Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.






## SINGLE LEG WITH MASTER LINK AND GRAB HOOK

Chain Size		Single Sling	Double Sling			Triple & Quad Sling		
MM	IN		90°	60°	45°	30°	60°	45°
7	9/32	4,300	7,400	6,100	4,300	11,200	9,100	6,400
8	5/16	5,700	9,900	8,100	5,700	14,800	12,100	7,500
10	3/8	8,800	15,200	12,400	8,800	22,900	18,700	13,200
13	1/2	15,000	26,000	21,200	15,000	39,000	31,800	22,500
16	5/8	22,600	39,100	32,000	22,600	58,700	47,900	33,900
20	3/4	35,300	61,100	49,900	35,300	91,700	74,900	53,000
22	7/8	42,700	74,000	60,400	42,700	110,900	90,600	64,000



Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.

## SINGLE LEG WITH MASTER LINK AND FOUNDRY HOOK

Chain Size		Single Sling
MM	IN	
		 90°
7	9/32	4,300
8	5/16	5,700
10	3/8	8,800
13	1/2	15,000
16	5/8	22,600
20	3/4	35,300
22	7/8	42,700

Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.





## ADJUSTABLE SINGLE

Chain Size		Single Sling
MM	IN	90°
7	9/32	4,300
8	5/16	5,700
10	3/8	8,800
13	1/2	15,000
16	5/8	22,600
20	3/4	35,300
22	7/8	42,700


*Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.*



## SINGLE ENDLESS BASKET



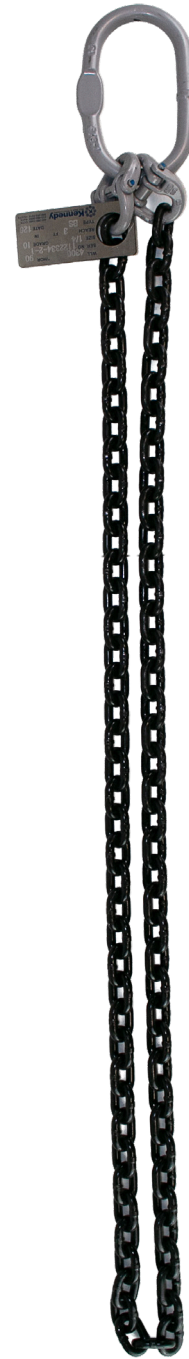

Chain Size		Single Sling
MM	IN	90°
7	9/32	4,300
8	5/16	5,700
10	3/8	8,800
13	1/2	15,000
16	5/8	22,600
20	3/4	35,300
22	7/8	42,700

Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.









**DOUBLE LEG WITH MASTER LINK AND GRAB HOOK**

Chain Size		Single Slings	Double Slings		
MM	IN				
		90°	60°	45°	30°
7	9/32	4,300	7,400	6,100	4,300
8	5/16	5,700	9,900	8,100	5,700
10	3/8	8,800	15,200	12,400	8,800
13	1/2	15,000	26,000	21,200	15,000
16	5/8	22,600	39,100	32,000	22,600
20	3/4	35,300	61,100	49,900	35,300
22	7/8	42,700	74,000	60,400	42,700



Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.

**DOUBLE LEG WITH MASTER LINK AND SLING HOOK**

Chain Size		Single Sling	Double Sling		
MM	IN				
		90°	60°	45°	30°
7	9/32	4,300	7,400	6,100	4,300
8	5/16	5,700	9,900	8,100	5,700
10	3/8	8,800	15,200	12,400	8,800
13	1/2	15,000	26,000	21,200	15,000
16	5/8	22,600	39,100	32,000	22,600
20	3/4	35,300	61,100	49,900	35,300
22	7/8	42,700	74,000	60,400	42,700



Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.



**DOUBLE LEG WITH MASTER LINK AND FOUNDRY HOOK**

Chain Size		Single Sling	Double Sling		
MM	IN		90°	60°	45°
7	9/32	4,300	7,400	6,100	4,300
8	5/16	5,700	9,900	8,100	5,700
10	3/8	8,800	15,200	12,400	8,800
13	1/2	15,000	26,000	21,200	15,000
16	5/8	22,600	39,100	32,000	22,600
20	3/4	35,300	61,100	49,900	35,300
22	7/8	42,700	74,000	60,400	42,700




Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.

## ADJUSTABLE DOUBLE




Chain Size		Single Sling	Double Sling		
MM	IN		90°	60°	45°
7	9/32	4,300	7,400	6,100	4,300
8	5/16	5,700	9,900	8,100	5,700
10	3/8	8,800	15,200	12,400	8,800
13	1/2	15,000	26,000	21,200	15,000
16	5/8	22,600	39,100	32,000	22,600
20	3/4	35,300	61,100	49,900	35,300
22	7/8	42,700	74,000	60,400	42,700

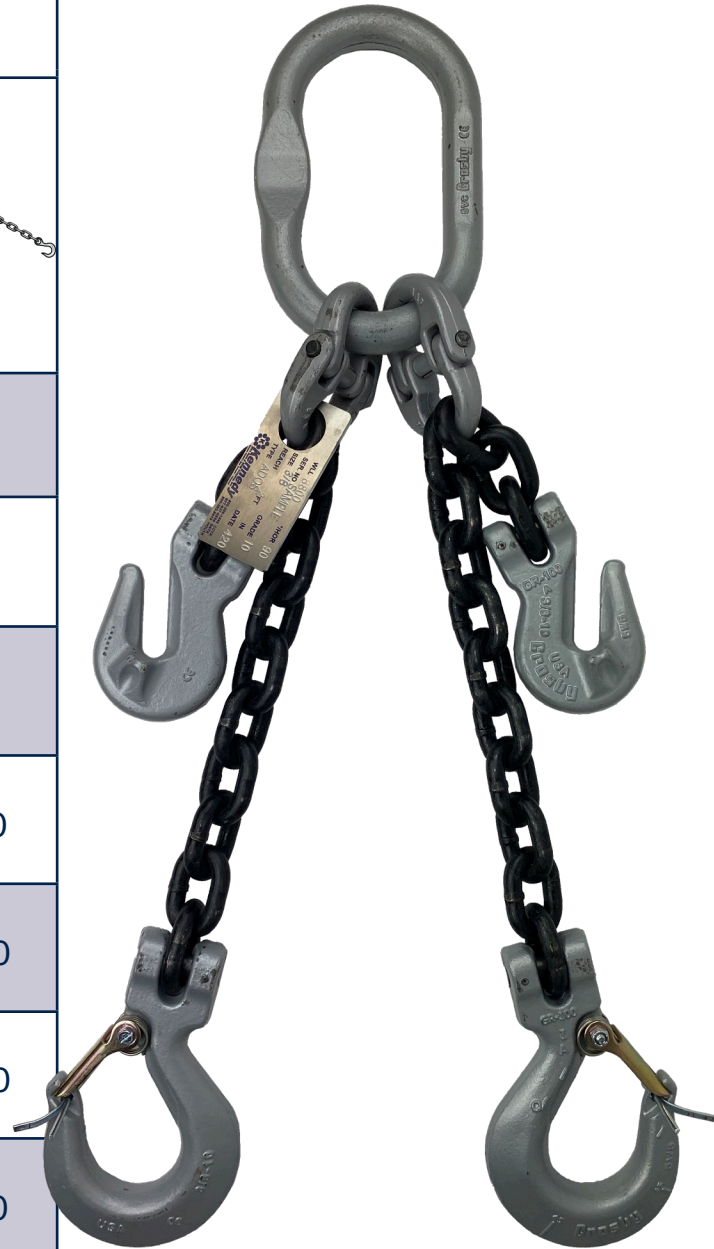Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.








## DOUBLE ENDLESS BASKET

Chain Size		Double Sling		
MM	IN			
		60°	45°	30°
7	9/32	7,400	6,100	4,300
8	5/16	9,900	8,100	5,700
10	3/8	15,200	12,400	8,800
13	1/2	26,000	21,200	15,000
16	5/8	39,100	32,000	22,600
20	3/4	61,100	49,900	35,300
22	7/8	74,000	60,400	42,700

Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.



## TRIPLE LEG WITH MASTER LINK AND SLING HOOK




Chain Size		Double Sling		
MM	IN			
		60°	45°	30°
7	9/32	11,200	9,100	5,400
8	5/16	14,800	12,100	7,500
10	3/8	22,900	18,700	13,200
13	1/2	32,000	31,800	22,500
16	5/8	58,700	47,900	33,900
20	3/4	91,700	74,900	53,000
22	7/8	110,900	90,600	64,000

Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.





## QUADRUPLE LEG WITH MASTER LINK AND SLING HOOK

Chain Size		Double Sling		
MM	IN			
		60°	45°	30°
7	9/32	11,200	9,100	5,400
8	5/16	14,800	12,100	7,500
10	3/8	22,900	18,700	13,200
13	1/2	32,000	31,800	22,500
16	5/8	58,700	47,900	33,900
20	3/4	91,700	74,900	53,000
22	7/8	110,900	90,600	64,000

Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.







# Kennedy

Wire Rope & Sling Company

## CORPUS CHRISTI

302 Flato Road  
Corpus Christi, TX 78405  
Phone: (800) 289-1445  
Fax: 361-289-7555

## SAN ANTONIO

4202 Dividend Dr  
San Antonio, TX 78219  
Phone: (833) 460-3095  
Fax: 210-527-9701

## HOUSTON

5600 Surrey Square  
Houston, TX 77017  
Phone: (800) 392-5510  
Fax: 713-673-2901





Certificate No. 7340




## AFFILIATES



 For more information, visit us at [kwrs.com](http://kwrs.com)

 @kennedywrs

 @kennedywireropeslingco

 Kennedy Wire Rope & Sling Co.