






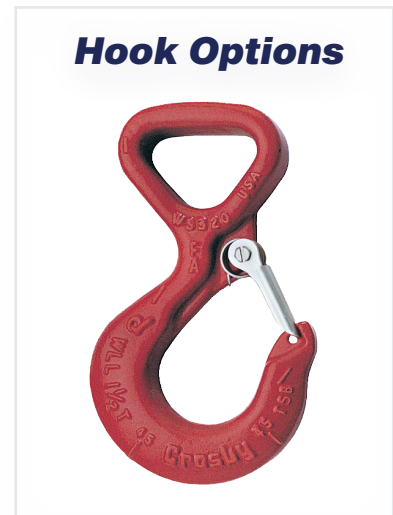
TYPE 13 THREE LEG SPREADER

! WARNING ! See page 12-14 for inspection and removal criteria

Nylon or polyester three leg spreaders are useful when the load is equipped with permanent lifting attachments. For such applications, three leg spreaders are lightweight, easy to use, and economical.



Stock #	Width (")	Ply	Degrees			Master Link Size (")	Hook Size (WLL)
			60° 	45° 	30° 		
OL-3-EEFC-1-91	1	1	4,150	3,350	2,400	3/4	1.5t Web Sling Hook
OL-3-EEFC-2-91	1	2	8,050	6,550	4,650	1	1.5t Web Sling Hook
OL-3-EEFC-1-92	2	1	8,050	6,550	4,650	3/4	1.5t Web Sling Hook
OL-3-EEFC-2-92	2	2	16,100	13,150	9,300	1	3t Web Sling Hook
OL-3-EEFC-1-93	3	1	12,200	9,950	7,050	1-1/2	3t Web Sling Hook
OL-3-EEFC-2-93	3	2	22,850	18,650	11,400	1-1/2	5t Web Sling Hook
OL-3-EEFC-4-93	3	4	42,550	34,750	24,600	1-1/2	*
OL-3-EEFC-1-94	4	1	16,100	13,150	9,300	1-1/2	3t Web Sling Hook
OL-3-EEFC-2-94	4	2	28,550	23,300	16,500	1-1/2	5t Web Sling Hook
OL-3-EEFC-4-94	4	4	52,950	43,250	30,600	2	*



*Available when a connection fitting is used for attaching the hook to the eye. Please contact our sales team for additional information.

Additional sizes available upon request. Please contact our sales team for special requirements.